


1.5KE530CA TRANSIENT VOLTAGE SUPPRESSOR

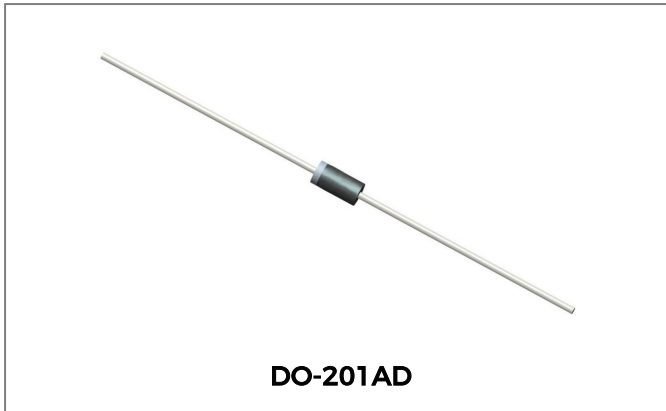

Features

- Low incremental surge resistance.
- Excellent clamping capability.
- High temperature wave soldering: 265°C/10s at terminals.
- Plastic package has underwriters laboratory flammability 94V-0.
- 1500W peak pulse power capability at 10×1000μs waveform.
- Fast response time: typically less than 1.0ps from 0V to VBR min.
- This is a Pb - Free Device
- All SMC Parts are Traceable to the Wafer Lot
- Additional testing can be offered upon request

Circuit Diagram



Mechanical Data

The 1.5KE530CA of high current bi-directional transient suppressors are designed for A.C. line protection and high power DC bus clamping applications. They provide a clamping voltage lower than the avalanche voltage. Therefore, any voltage rise due to increased current conduction is contained to a minimum, providing the best possible protection level. They can also be connected in series and/or parallel to create very high capacity protection solutions.

Absolute Maximum Ratings@T_A=25°C, RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak pulse power dissipation on 10/1000μs waveform	P _{PPM}	1500	W
Steady state power dissipation at T _L =75°C	P _{M(AV)}	6.5	W
Typical Thermal Resistance Junction to Lead	R _{θJL}	15	°C/W
Typical Thermal Resistance Junction to Ambient	R _{θJA}	75	°C/W
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-55 to + 150	°C

Electrical Characteristics @ $T_A=25^\circ\text{C}$ unless otherwise specified

BI-POLAR	REVERSE STAND-OFF VOLTAGE V_{RWM} (V)	BREAKDOWN VOLTAGE V_{BR} (V) MIN. @ I_T	BREAKDOWN VOLTAGE V_{BR} (V) MAX. @ I_T	TEST CURRENT I_T (MA)	MAXIMUM CLAMPING VOLTAGE @ I_{PP} V_C (V)	PEAK PULSE CURRENT $I_{PP}^{(1)}$ (A)	REVERSE LEAKAGE @ V_{RWM} I_R (μ A)
1.5KE530CA	449	503	557	1	724	2.1	1

Notes: 1. Surge waveform:10/1000 μ s.

Ratings and Characteristics Curves

FIG.1: Pulse waveform



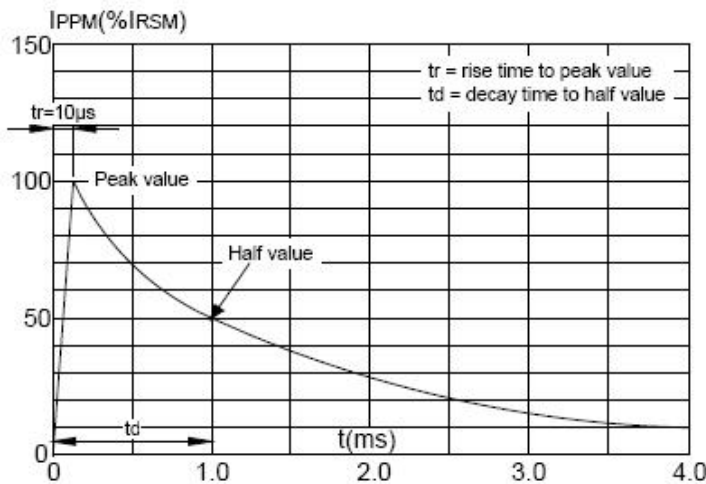


FIG.2: Pulse derating curve

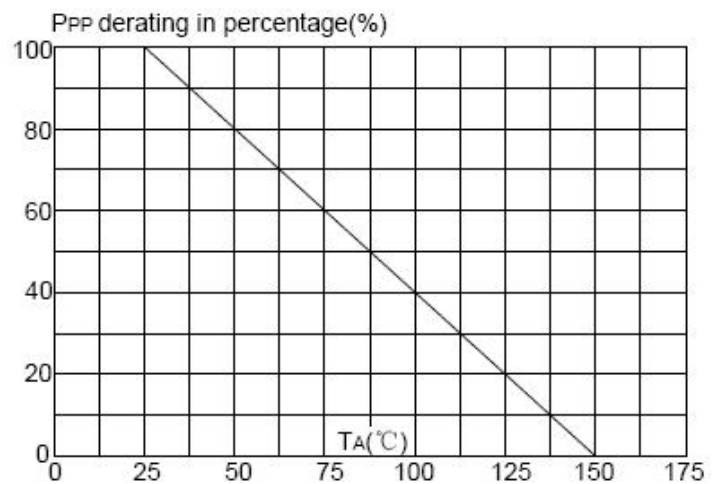

Mechanical Dimensions DO-201AD

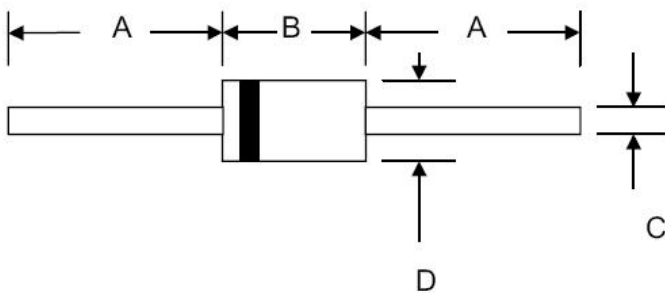

SYMBOL	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	25.4	-	1.000	-
B	7.20	9.60	0.283	0.378
C	0.96	1.20	0.038	0.047
D	4.80	5.40	0.189	0.213

Ordering Information


Device	Package	Shipping
1.5KE530CA	DO-201AD (Pb-Free)	1000pcs / tape
1.5KE530CATA	DO-201AD (Pb-Free)	1000pcs / tape

For information on tape and reel specifications, including part orientation and tape sizes, please refer to our tape and reel packaging specification.

Marking Diagram



Carrier Tape Specification DO-201AD

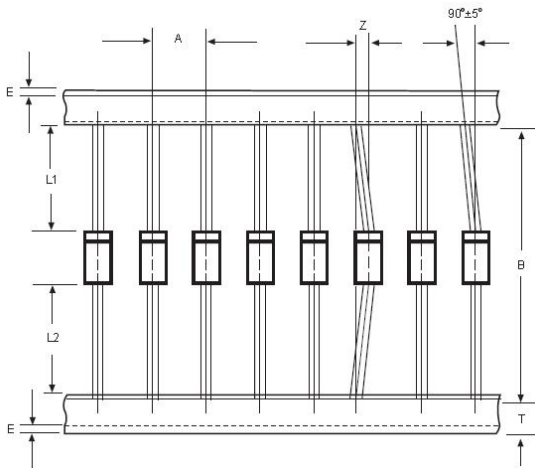

SYMBOL	Millimeters	
	Min.	Max.
A	9.50	10.50
B	50.9	53.9
Z	-	1.20
T	5.60	6.40
E	-	0.80
IL1-L2I	-	1.0

DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the SMC Diode Solutions sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall SMC Diode Solutions be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). SMC Diode Solution assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall SMC Diode Solutions be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or SMC Diode Solutions.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of SMC Diode Solutions.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.