



3KP SERIES GLASS PASSIVATED TRANSIENT VOLTAGE SUPPRESSOR

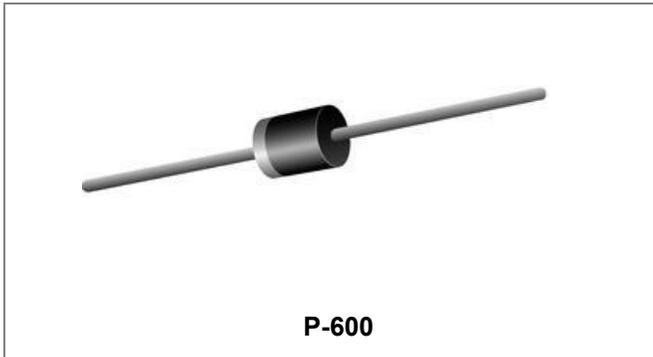

Features

- Glass Passivated Die Construction
- 3000W Peak Pulse Power Dissipation
- 5.0- 170V Standoff Voltage
- Uni- and Bi-Directional Versions Available
- Excellent Clamping Capability
- Fast Response Time
- Plastic Case Material has UL Flammability Classification Rating 94V-0
- This is a Pb – Free Device
- All SMC Parts are Traceable to the Wafer Lot
- Additional testing can be offered upon request

Circuit Diagram

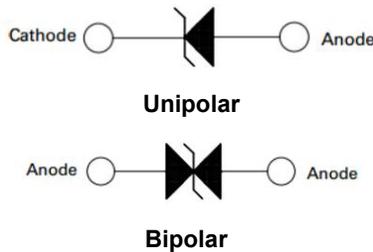

Mechanical Data

- Case: Molded Plastic over glass passivated junction
- Terminals: Axial leads , Solderable per MIL-STD 750, Method 2026
- Polarity: Cathode Band or Cathode Notch
- Mounting Position: Any
- Weight:2.1 grams(approx.)

Maximum Ratings and Thermal Characteristics@ $T_A=25^{\circ}\text{C}$ unless otherwise specified

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation at $T_A=25^{\circ}\text{C}$ (Note 1,2,5) Figure 1	P_{PPM}	3000	W
Steady State Power Dissipation (Note 2, 4)	$P_{M(AV)}$	8.0	W
Peak Forward Surge Current, 8.3ms Single Half Sine Wave Unidirectional Only(Note 3)	I_{FSM}	250	A
Typical Thermal Resistance Junction to Lead	$R_{\theta JL}$	8	$^{\circ}\text{C/W}$
Typical Thermal Resistance Junction to Ambient	$R_{\theta JA}$	40	$^{\circ}\text{C/W}$
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 175	$^{\circ}\text{C}$

- Notes:**
1. Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25^{\circ}\text{C}$ per Fig. 2.
 2. Mounted on 20 mm² copper pad
 3. 8.3ms single half sine wave, or equivalent square, duty cycle=4 pulses per minute maximum.
 4. Lead temperature at 75 $^{\circ}\text{C} = T_L$
 5. Peak Pulse power waveform is 10x1000 μs

Electrical Characteristics @T_A=25°C unless otherwise specified

UNI-POLAR	BI-POLAR	REVERSE STAND-OFF VOLTAGE V _{RWM} (V)	BREAKDOWN VOLTAGE V _{BR} (V) MIN. @I _T	BREAKDOWN VOLTAGE V _{BR} (V) MAX. @I _T	TEST CURRENT I _T (MA)	MAXIMUM CLAMPING VOLTAGE @I _{PP} V _C (V)	PEAK PULSE CURRENT I _{PP} (A)	REVERSE LEAKAGE @V _{RWM} I _R (uA)
3KP5.0A	3KP5.0CA	5	6.4	7	50	9.2	326.1	2000
3KP6.0A	3KP6.0CA	6	6.67	7.37	50	10.3	291.3	2000
3KP6.5A	3KP6.5CA	6.5	7.22	7.98	50	11.2	267.9	1000
3KP7.0A	3KP7.0CA	7	7.78	8.6	50	12	250	400
3KP7.5A	3KP7.5CA	7.5	8.33	9.21	5	12.9	232.6	200
3KP8.0A	3KP8.0CA	8	8.89	9.83	5	13.6	220.6	100
3KP8.5A	3KP8.5CA	8.5	9.44	10.4	5	14.4	208.3	50
3KP9.0A	3KP9.0CA	9	10	11.1	5	15.4	194.8	20
3KP10A	3KP10CA	10	11.1	12.3	5	17	176.5	15
3KP11A	3KP11CA	11	12.2	13.5	5	18.2	164.8	10
3KP12A	3KP12CA	12	13.3	14.7	5	19.9	150.8	10
3KP13A	3KP13CA	13	14.4	15.9	5	21.5	139.5	10
3KP14A	3KP14CA	14	15.6	17.2	5	23.2	129.3	10
3KP15A	3KP15CA	15	16.7	18.5	5	24.4	123	10
3KP16A	3KP16CA	16	17.8	19.7	5	26	115.4	10
3KP17A	3KP17CA	17	18.9	20.9	5	27.6	108.7	10
3KP18A	3KP18CA	18	20	22.1	5	29.2	102.7	10
3KP20A	3KP20CA	20	22.2	24.5	5	32.4	92.6	10
3KP22A	3KP22CA	22	24.4	26.9	5	35.5	84.5	10
3KP24A	3KP24CA	24	26.7	29.5	5	38.9	77.1	10
3KP26A	3KP26CA	26	28.9	31.9	5	42.1	71.3	10
3KP28A	3KP28CA	28	31.1	34.4	5	45.4	66.1	10
3KP30A	3KP30CA	30	33.3	36.8	5	48.4	62	10
3KP33A	3KP33CA	33	36.7	40.6	5	53.3	56.3	10
3KP36A	3KP36CA	36	40	44.2	5	58.1	51.6	10
3KP40A	3KP40CA	40	44.4	49.1	5	64.5	46.5	10
3KP43A	3KP43CA	43	47.8	52.8	5	69.4	43.2	10
3KP45A	3KP45CA	45	50	55.3	5	72.7	41.3	10
3KP48A	3KP48CA	48	53.3	58.9	5	77.4	38.8	10
3KP51A	3KP51CA	51	56.7	62.7	5	82.4	36.4	10
3KP54A	3KP54CA	54	60	66.3	5	87.1	34.4	10
3KP58A	3KP58CA	58	64.4	71.2	5	93.6	32.1	10
3KP60A	3KP60CA	60	66.7	73.7	5	96.8	31	10
3KP64A	3KP64CA	64	71.1	78.6	5	103	29.1	10
3KP70A	3KP70CA	70	77.8	86	5	113	26.5	10
3KP75A	3KP75CA	75	83.3	92.1	5	121	24.8	10
3KP78A	3KP78CA	78	86.7	95.8	5	126	23.8	10
3KP85A	3KP85CA	85	94.4	104	5	137	21.9	10
3KP90A	3KP90CA	90	100	111	5	146	20.5	10
3KP100A	3KP100CA	100	111	123	5	162	18.5	10
3KP110A	3KP110CA	110	122	135	5	177	16.9	10
3KP120A	3KP120CA	120	133	147	5	193	15.5	10
3KP130A	3KP130CA	130	144	159	5	209	14.4	10
3KP150A	3KP150CA	150	167	185	5	243	12.3	10
3KP160A	3KP160CA	160	178	197	5	259	11.6	10
3KP170A	3KP170CA	170	189	209	5	275	10.9	10

Technical Data
Data Sheet N0212, Rev. A



For parts without A, the VBR is + 10% and VC is 5% higher than with A parts
For bidirectional type having VR of 10 volts and less, the IR limit is double.

Ratings and Characteristics Curves

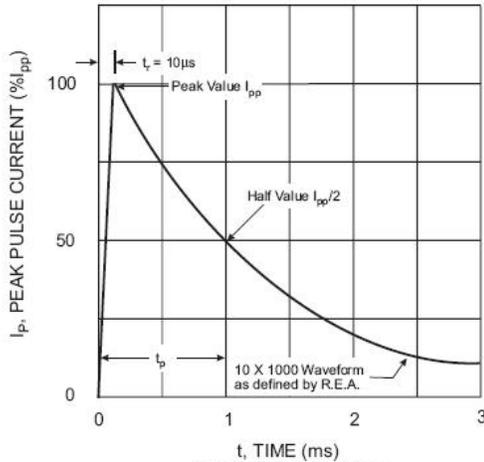


Fig. 1 Pulse Waveform

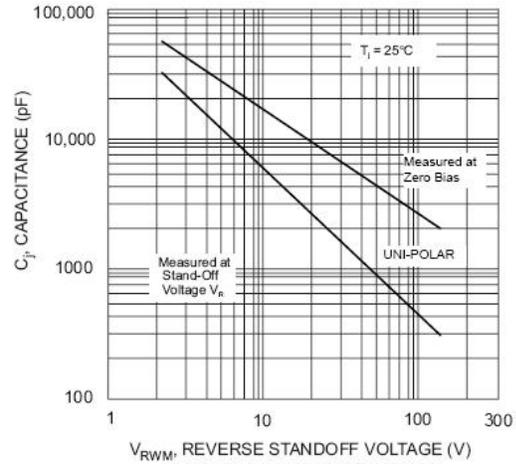


Fig. 2 Typical Junction Capacitance

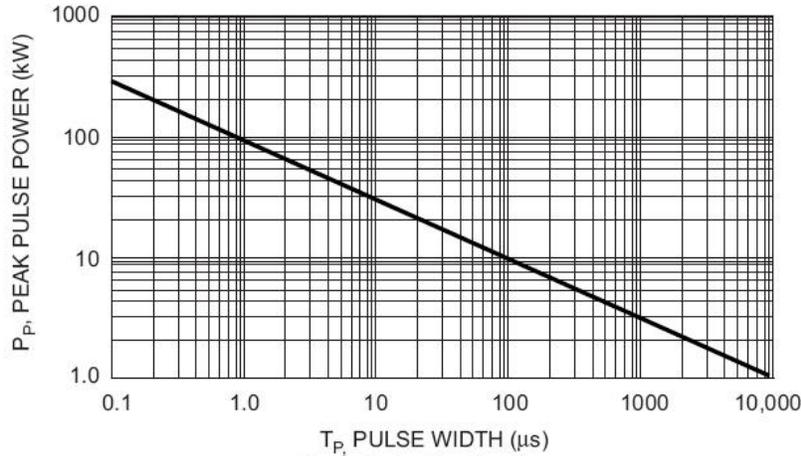


Fig. 3 Pulse Derating Curve

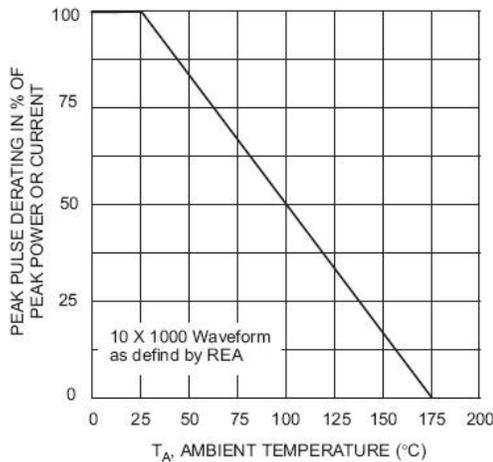


Fig. 4 Pulse Derating Curve


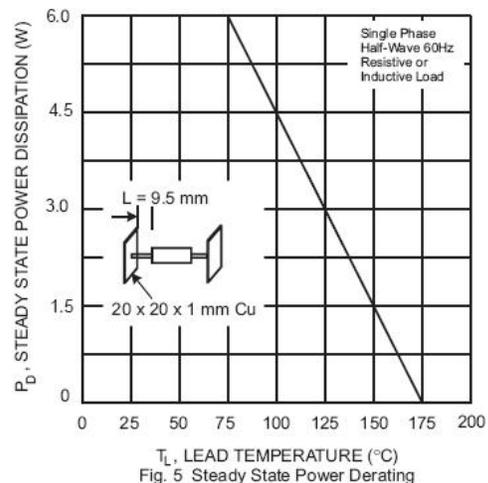


Fig. 5 Steady State Power Derating

- China - Germany - Korea - Singapore - United States •
- <http://www.smc-diodes.com> - sales@smc-diodes.com •

Mechanical Dimensions P-600(Inches/Millimeters)

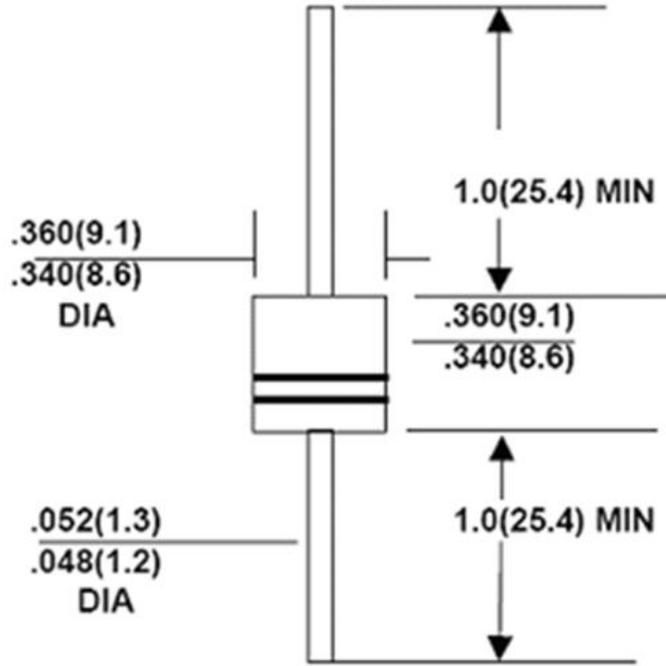


Ordering Information

Device	Package	Shipping
3KP SERIES	P-600(Pb-Free)	300pcs /tape
3KP SERIES TA	P-600(Pb-Free)	300pcs /tape

For information on tape and reel specifications, including part orientation and tape sizes, please refer to our tape and reel packaging specification.


Marking Diagram

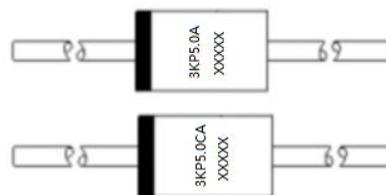

Where XXXXX is YYWWL
 $3KP5.0A/3KP5.0CA$ = Part Name
 YY = Year
 WW = Week
 L = Lot Number

Cautions: Molding resin
Epoxy resin UL:94V-0

Carrier Tape Specification P-600

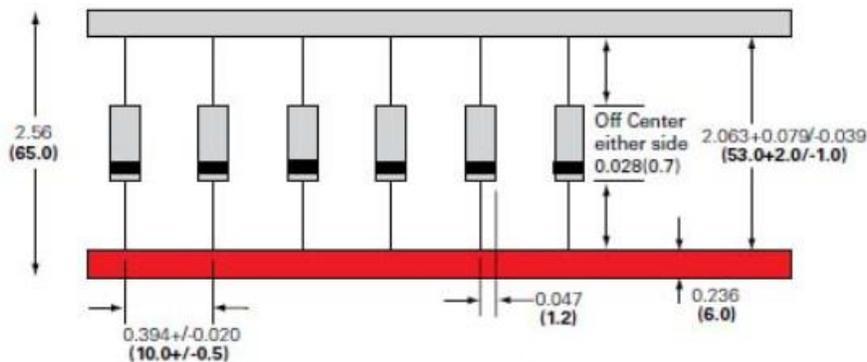

- China - Germany - Korea - Singapore - United States •
- <http://www.smc-diodes.com> - sales@smc-diodes.com •

DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the SMC Diode Solutions sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall SMC Diode Solutions be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). SMC Diode Solution assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall SMC Diode Solutions be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or SMC Diode Solutions.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of SMC Diode Solutions.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations..