

5.0SMHJ10A THRU 5.0SMHJ43A SURFACE MOUNT TRANSIENT VOLTAGE SUPPRESSOR



Features

- For surface mounted applications in order to optimize board space
- $T_J=185^{\circ}\text{C}$, diodes are suitable for high temperature applications
- Low profile package
- Built-in strain relief
- Glass passivated junction
- Low inductance
- Excellent clamping capability
- Repetition rate (duty cycle):0.01%
- Fast response time: typically less than 1.0 ps from 0 volts to BV for unidirectional types
- Plastic Case Material has UL Flammability Classification Rating 94V-0
- High temperature soldering: $260^{\circ}\text{C}/40$ seconds at terminals

Circuit Diagram



Mechanical Data

- Case: SMC Low Profile Molded Plastic
- Terminals: Solder Plated , Solderable per MIL-STD 750, Method 2026
- Polarity: Color band denoted positive end(cathode)

Maximum Ratings and Thermal Characteristics@ $T_A=25^{\circ}\text{C}$ unless otherwise specified

Parameter	Symbol	Value	Units
Peak Pulse Power Dissipation on 10/1000 us waveform (NOTE 1, 2, Fig.1)	P_{PPM}	5000	W
Peak Forward Surge Current, 8.3ms Single Half Sine Wave (Note 2),(Note 3)	I_{FSM}	300	A
Typical Thermal Resistance Junction to Mount	$R_{\theta JM}$	20.8	$^{\circ}\text{C}/\text{W}$
Typical Thermal Resistance Junction to Ambient	$R_{\theta JA}$	100	$^{\circ}\text{C}/\text{W}$
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-65 to 185	$^{\circ}\text{C}$


Notes: 1. Non-repetitive current pulse , per Fig. 3 and derated above $T_L=25^{\circ}\text{C}$ per Fig. 2.
2. Mounted on 8.0x8.0mm Copper Pads to each terminal.
3. Measured on 8.3ms single half sine wave or equivalent square wave, duty cycle=4pulses per minute maximum.

Ordering Information

Device	Package	Shipping
5.0SMHJ10A THRU 5.0SMHJ43A	SMC (Pb-Free)	3000pcs / reel
5.0SMHJ10ATR THRU 5.0SMHJ43ATR	SMC (Pb-Free)	3000pcs / reel

For information on tape and reel specifications, including part orientation and tape sizes, please refer to our tape and reel packaging specification.

Marking Diagram



Where XXXXX is YYWWL

5AX = Marking Code
YY = Year
WW = Week
L = Lot Number

Cautions: Molding resin
Epoxy resin UL:94V-0







Electrical Characteristics@T_A=25°C unless otherwise specified

DEVICE TYPE	DEVICE MARKING CODE	REVERSE STAND-OFF VOLTAGE V _{RWM} (V)	BREAKDOWN VOLTAGE V _{BR} (V) MIN. @I _T ⁽¹⁾	BREAKDOWN VOLTAGE V _{BR} (V) MAX. @I _T ⁽¹⁾	TEST CURRENT I _T (mA)	MAXIMUM CLAMPING VOLTAGE @I _{PP} V _C (V)	PEAK PULSE CURRENT I _{PP} (A) ⁽²⁾	REVERSE LEAKAGE @V _{RWM} I _R (uA)	REVERSE LEAKAGE @V _{RWM} T _J =150°C I _R (uA)
5.0SMHJ10A	5AX	10	11.1	12.3	1	17	294.1	20	500
5.0SMHJ12A	5BE	12	13.3	14.7	1	19.9	251.3	10	300
5.0SMHJ13A	5BG	13	14.4	15.9	1	21.5	232.6	10	300
5.0SMHJ16A	5BP	16	17.8	19.7	1	26	192.3	2	50
5.0SMHJ17A	5BR	17	18.9	20.9	1	27.6	181.2	2	50
5.0SMHJ18A	5BT	18	20	22.1	1	29.2	171.2	2	50
5.0SMHJ20A	5BV	20	22.2	24.5	1	32.4	154.3	2	50
5.0SMHJ22A	5BX	22	24.4	26.9	1	35.5	140.8	2	50
5.0SMHJ24A	5BZ	24	26.7	29.5	1	38.9	128.5	2	50
5.0SMHJ26A	5CE	26	28.9	31.9	1	42.1	118.8	2	50
5.0SMHJ28A	5CG	28	31.1	34.4	1	45.4	110.1	2	50
5.0SMHJ30A	5CK	30	33.3	36.8	1	48.4	103.3	2	50
5.0SMHJ33A	5CM	33	36.7	40.6	1	53.3	93.8	2	50
5.0SMHJ36A	5CP	36	40	44.2	1	58.1	86.1	2	50
5.0SMHJ40A	5CR	40	44.4	49.1	1	64.5	77.5	2	50
5.0SMHJ43A	5CT	43	47.8	52.8	1	69.4	72.0	2	50


Notes

- (1) Pulse test: t_p ≤ 50 ms
- (2) Surge current waveform per fig. 3 and derated per fig. 2
- (3) All terms and symbols are consistent with ANSI/IEEE C62.35

Ratings and Characteristics Curves

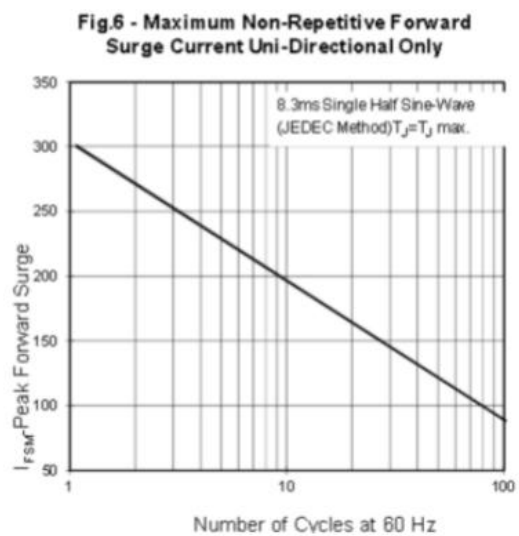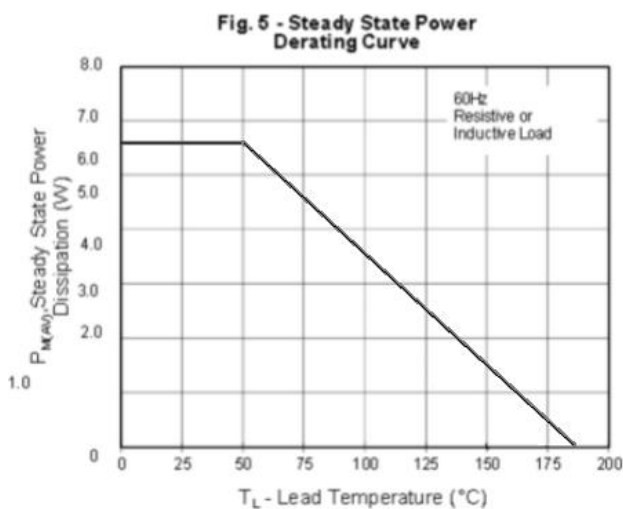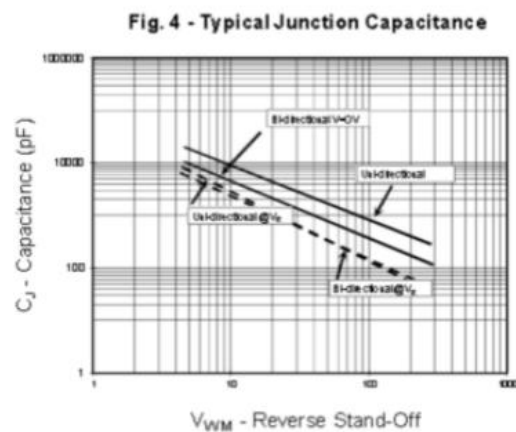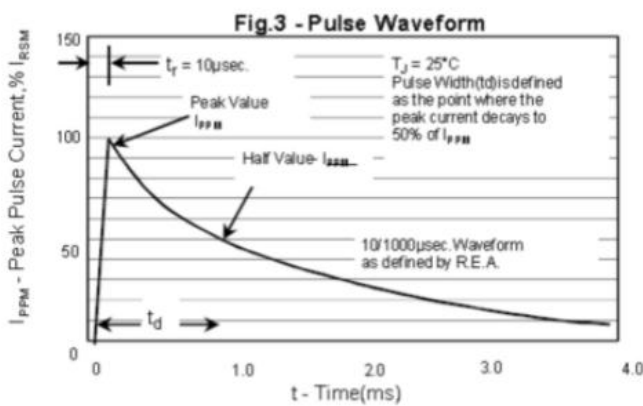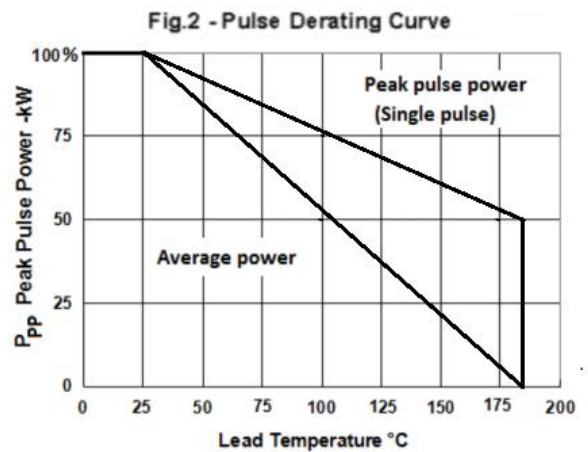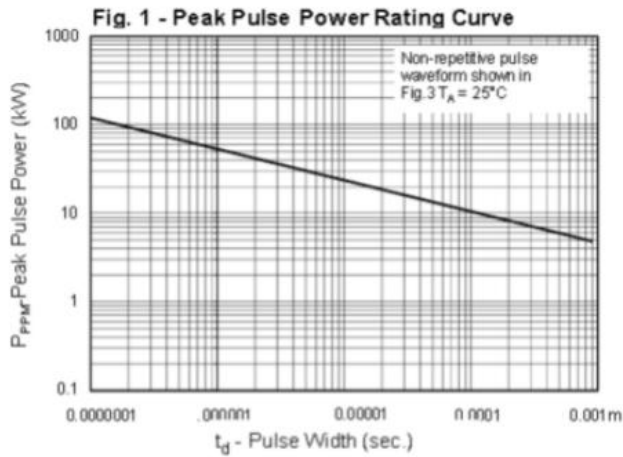


Mechanical Dimensions SMC

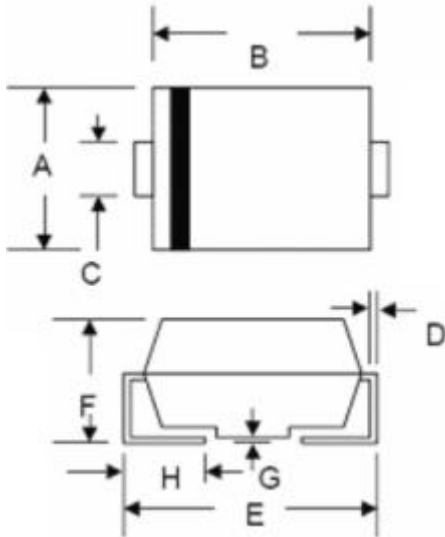

SMC/DO-214AB				
Dim.	Min.	Max.	Min.	Max.
A	5.59	6.22	0.220	0.245
B	6.60	7.11	0.260	0.280
C	2.90	3.20	0.114	0.126
D	0.152	0.305	0.006	0.012
E	7.75	8.13	0.305	0.320
F	2.00	2.62	0.079	0.103
G	-	0.203	-	0.008
H	0.76	1.52	0.030	0.060
In Millimeters			In inches	

Carrier Tape Specification SMC

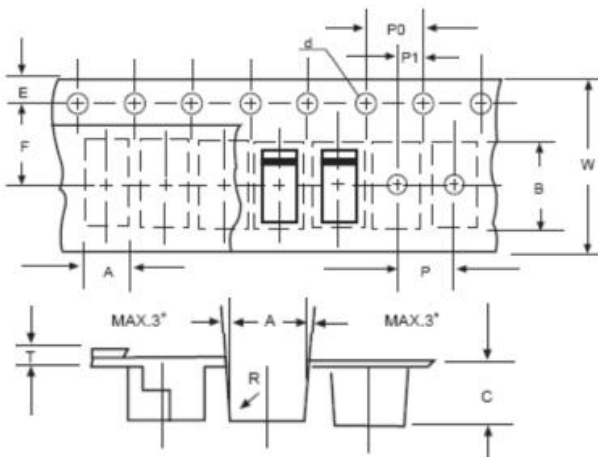

SYMBOL	Millimeters	
	Min.	Max.
A	5.90	6.10
B	8.20	8.40
C	2.40	2.60
d	1.40	1.60
E	1.40	1.60
F	7.60	7.70
P	7.90	8.10
P0	3.90	4.10
P1	3.90	4.10
T	-	0.600
W	15.80	16.20



5.0SMHJ10A
THRU
5.0SMHJ43A

Technical Data
Data Sheet N1959 Rev. -



DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the SMC Diode Solutions sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall SMC Diode Solutions be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). SMC Diode Solution assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall SMC Diode Solutions be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or SMC Diode Solutions.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of SMC Diode Solutions.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations..