


Technical Data  
Data Sheet D0303, REV.A

# SD3-0650-S035AB

## SiC Schottky Power Rectifier Chip

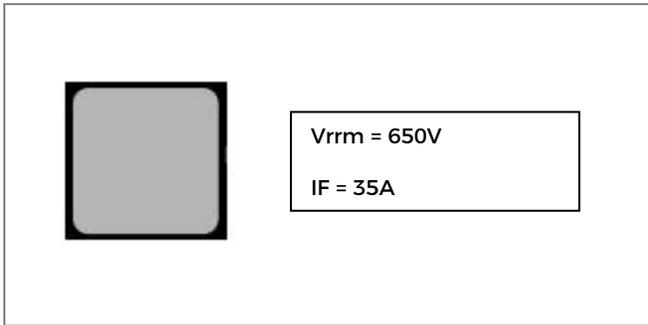

### Description

- 650-Volt Schottky Rectifier
- Zero Reverse Recovery
- Zero Forward Recovery
- High-Frequency Operation
- Temperature-Independent Switching Behavior
- Extremely Fast Switching
- Positive Temperature Coefficient on VF

Part Number	Die Size	Anode	Cathode
SD3-0650-S035AB	Please contact your sales representative to get the detailed information about die layout and dimensions.	Al	Ag

### Maximum Ratings:

Parameter	Symbol	Value	Units
Repetitive Peak Reverse Voltage	$V_{RRM}$	650	V
Surge Peak Reverse Voltage	$V_{RSM}$	650	V
DC Peak Blocking Voltage	$V_R$	650	V
Maximum DC Current*	$I_F$	35	A
Repetitive Peak Forward Surge Current	$I_{FRM}$	135	A
Peak One Cycle Non-Repetitive Surge Current	$I_{FSM}$	270	A
Operating Junction and Storage Temperature	$T_J, T_{stg}$	-55 to +175	°C

Technical Data  
Data Sheet D0303, REV.A

**Electrical Characteristics(T=25°C unless otherwise specified):**

Characteristics	Symbol	Condition	Typ.	Max.	Units
Forward Voltage Drop*	V <sub>F1</sub>	@ 35A, Pulse, T <sub>J</sub> = 25 °C	1.55	1.7	V
	V <sub>F2</sub>	@ 35A, Pulse, T <sub>J</sub> = 175 °C	2.0	2.4	V
Reverse Current*	I <sub>R1</sub>	@V <sub>R</sub> = rated V <sub>R</sub> , T <sub>J</sub> = 25 °C	0.6	80	uA
	I <sub>R2</sub>	@V <sub>R</sub> = rated V <sub>R</sub> , T <sub>J</sub> = 175 °C	12	200	uA
Junction Capacitance	C <sub>T</sub>	V <sub>R</sub> =0V, T <sub>J</sub> =25°C, f=1MHz	2022	-	pF
Reverse Recovery Charge	Q <sub>c</sub>	I <sub>F</sub> = 35A, di/dt = 200A/μs V <sub>R</sub> = 400 V, T <sub>J</sub> =25°C	126.15	-	nC
Capacitance Stored Energy	EC	V <sub>R</sub> = 400 V, T <sub>J</sub> =25°C	30.90	-	μJ

\* Pulse width < 300 μs, duty cycle < 2%

**Technical Data**

**Data Sheet D0303, REV.A**

**DISCLAIMER:**

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the SMC Diode Solutions sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall SMC Diode Solutions be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). SMC Diode Solution assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall SMC Diode Solutions be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or SMC Diode Solutions.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of SMC Diode Solutions.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations..